

TKS-105a-TB38-MODUL



Features and benefits:

- Integrated 38 mm industrial trackball
- Highly reliable OMRON mechanical switches
- Positive tactile feedback and key embossing
- PS/2 and USB compatible
- Suitable for use 19 inch 1U drawer units
- Panel mount version with reverse side screwing studs
- Rugged construction for reliable functionality
- Chemical, abrasion and scratch resistant frontsheet
- > IP65 (NEMA 4x) sealing
- > 3 million operations per key
- Activation force 2.6 N, key travel 0,3 mm

Specification Keyboard


Number of Keys: 105
 Keyswitch Technology: short travel keys
 Actuation Force/ -Travel: 2.6 N / 0.3 mm
 Keyswitch Lifetime: 3 mil. operations
 Protection Level: IP65, NEMA 4x (frontside)
 Mounting Type: panel mount
 Dimensions: 482.6 x 177.8 x 54 mm, 19" x 7" x 2.125"
 Weight: 1600 g
 Operating Temperature: -40 °C to +90 °C, -40 °F to +194 °F
 Front Panel Material: aluminium

Specification Trackball

Ball Diameter: 38 mm / 1.5"
 Actuation Force : 50 g
 Trackball Lifetime: > 6 mil. revolutions
 Protection Level IP65 static; IP54 dynamic; NEMA 3 (frontside)

Cat.-No.	Product Name	
KS08308	TKS-105a-TB38-MODUL-PS/2-US	38 mm / 1,5" Trackb.; PS/2; US-Layout
KS09498	TKS-105a-TB38-MODUL-USB-US	38 mm / 1,5" Trackb.; USB; US-Layout
KY02000	TKS-105a-MODUL-SCHABLONE	Template
Other language versions/interfaces/configuration available on request		

TKS-105a-TB38-MODUL

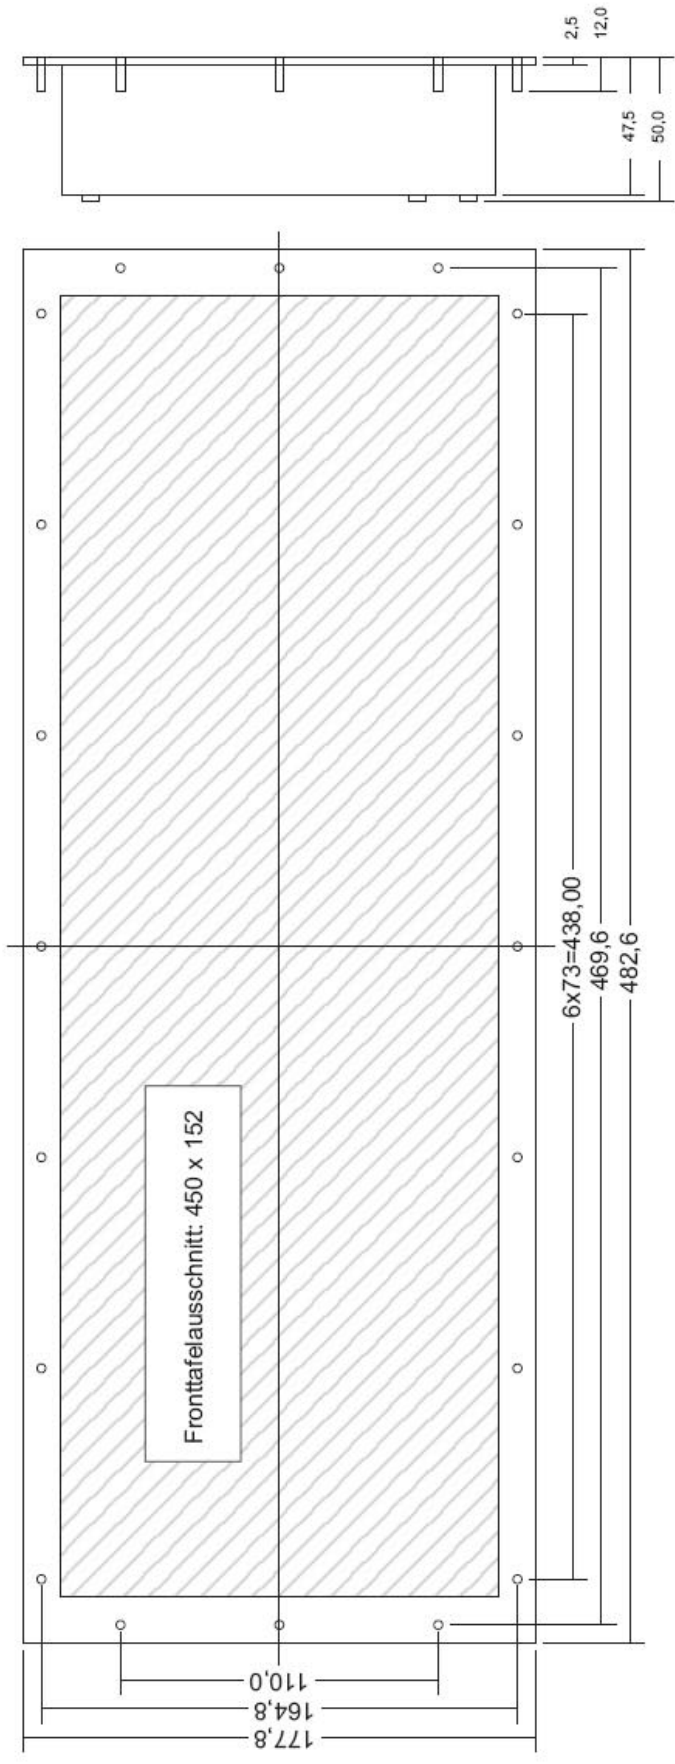

Toleranzen: DIN ISO 2768 T1-m
Abmessungen in mm